

# VDP-DH-HAC9210

## 2MP IP Villa Outdoor Station



### Technical Specification

Model	VDP-DH-HAC9210
-------	----------------

#### System

Main Processor	Embedded Micro Processor
----------------	--------------------------

Operation System	Embedded LINUX OS
------------------	-------------------

#### Camera

Image Sensor	1/2.7" 2MP CMOS
--------------	-----------------

Focal Length	2.8mm
--------------	-------

Angle of View	H:100°
---------------	--------

Angle of View adjustment	Horizontal: -45° ~ +45°
--------------------------	-------------------------

#### Video

Video Compression	H.264
-------------------	-------

Video Streaming	Dual Stream
-----------------	-------------

Day/Night	Auto(ICR), 5m
-----------	---------------

BLC Mode	WDR
----------	-----

White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
---------------	---

Gain Control	Auto/Manual
--------------	-------------

OSD	Support
-----	---------

#### Audio

Audio Compression	G.711
-------------------	-------

Audio Input	Omnidirectional Mic
-------------	---------------------

Audio Output	Built-in Speaker
--------------	------------------

Bidirectional Talk	Support Dual-way Bidirectional talk
--------------------	-------------------------------------

Audio processing	Noise suppression, Echo cancellation
------------------	--------------------------------------

#### Operation Mode

Keypad	1 Mechanical Button
--------	---------------------

### Features

- 2MP HD CMOS camera
- Zinc alloy panel, IP65, IK10
- 5m ICR Night vision & Voice indication
- Video & Audio messaging
- TCP/IP, SIP
- Surface mounted



### Interface

Door Control	1
Alarm In	1
RS485	1


### Network

Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP, SIP


### General

Ingress Protection	IP65, IK10
Tamper Switch	1
Tamper Screw	Support
Installation	Surface
Material	Front Panel: Zinc alloy Rear Panel: Aluminum alloy Holder: Aluminum alloy
Power	DC 12V, PoE(802.3af)
Power Consumption	Standby ≤2.5W, Work ≤7W
Working Temperature	-40°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	163.0mm×73.0mm×54.5.0mm
Weight	0.8Kg

Dimensions

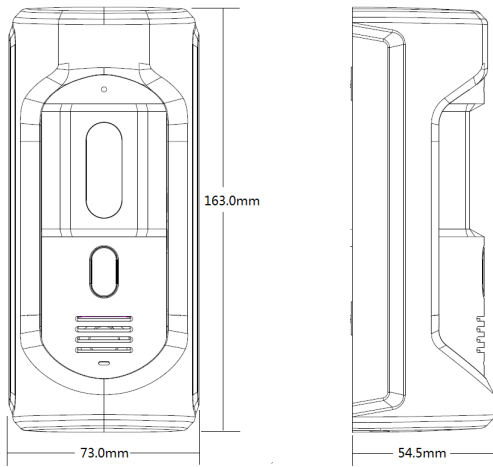

View Area

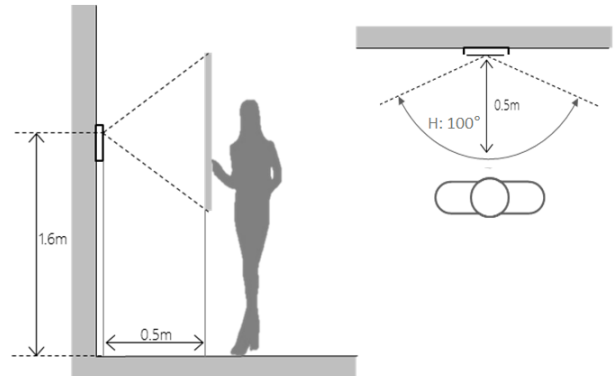

Application

