


Face Comparison Time	≤0.3s
Capacity	
Face Capacity	20,000
Card Capacity	10,000
Fingerprint Capacity	10,000
Port	
RS-485	1
Wiegand	1 (input or output)
Ethernet	1 10M/100M/1000M Ethernet port
Alarm Input	2 (Switch quantity)
Alarm Output	2 (Dry contact)
Alarm Linkage	Yes
Power Output	1 DC 12V/100ma
Exit Button	1
Door Status Detection	1
Lock Control	1, normally on or off by default
Alarm	
Tamper Alarm	Yes
Duress Alarm	Yes
Door Sensor Timeout	Yes
Regular	
Ingress Protection	IP66 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
Power Supply	Optional
Power Supply Mode	DC 12V/2A
Power Consumption	≤24.0W
Product Dimensions	389mm×145mm×43mm (15.31"×5.71"×1.69")
Packaging Dimensions	413mm×182mm×104mm (16.26"×7.17"×4.09")
Operating Temperature	-20°C to +60°C (-4°F to + 140°F)
Operating Humidity	10%RH–90%RH
Operating Altitude	86kPa–106kPa
Gross Weight	1.91kg (4.21 lb)
Accessory	Mount plate
Installation Method	Surface mount and flush mount
Operating Environment	Outdoor

Dimensions (mm[inch])



Application

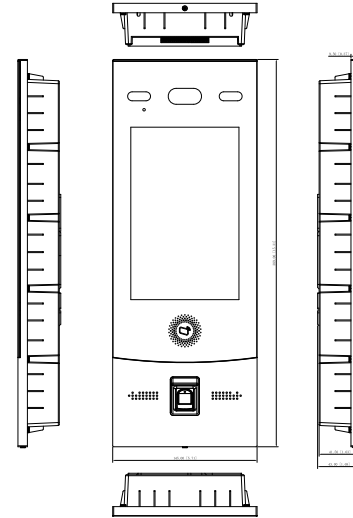