



DESCRIPTION

The JO-DV is an aluminum die cast surface mount video door station. The JO-DV can be used with the JO Series or with the GT-MKB-N video guard station in the GT Series. The station will connect to the master/guard station, expansion station, or two door station adaptor (JOW-2D) using an 18 AWG 2-conductor solid core cable. The JO-DV includes a camera, microphone, speaker, and call button.

When the call button on the JO-DV is pressed, the inside stations will ring and the image from the door station's camera. The user at the inside station touches the button to initiate communication and the person at the door station speaks hands-free.


FEATURES

- Video with audio intercom
- Two-way hands-free voice communication
- Call button to initiate call
- White LED illuminator for low light conditions
- Simple 2-conductor wiring
- Surface mount
- 330' wiring distance to master on 18 AWG 2-conductor cable (Aiphone wire #871802)
- Only JO door station that is sold separately

JO-DV

Camera Door Station for the JO Series

FEATURE CALL-OUT

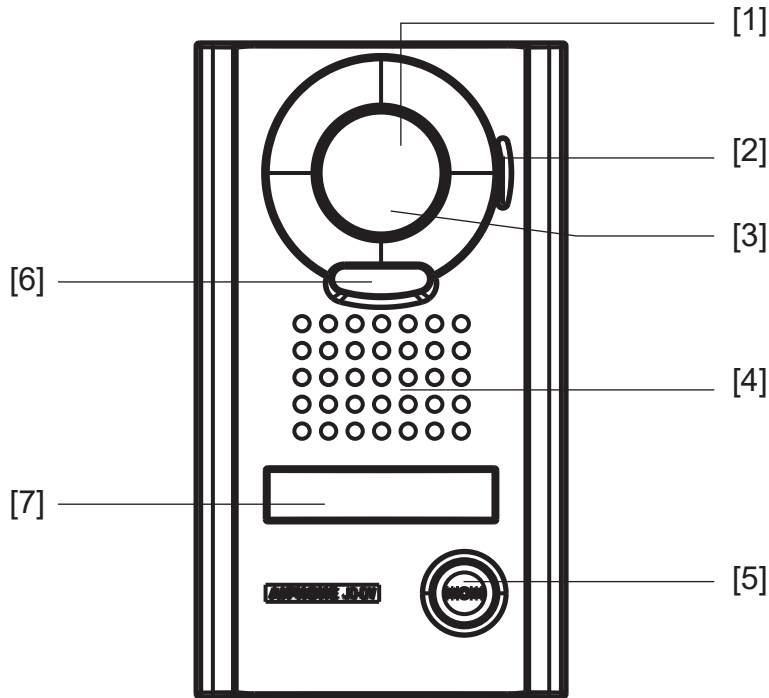

FEATURE CALL-OUT DEFINITIONS

- [1] Camera
- [2] Microphone
- [3] Illumination sensor
- [4] Speaker
- [5] Call button
- [6] White LED
- [7] Directory Card

SPECIFICATIONS

Power Source:	Supplied from master
Communication:	Hands-free communication
Camera:	CMOS
Min. illumination:	5 lux
Wiring:	2-conductor, PE insulation, Aiphone wire #871802
Wiring Distance:	330'
Operation Temp:	-40~140° F (-40 ~ 60° C)
Dimensions: HxWxD	6-13/16" x 3-7/8" x 1-1/16" (179 x 98 x 26.8 mm)
Weight: (approx)	1.43lbs (650g)